



Nikko-Rack™

QUICK ADJUSTABLE MAGAZINES PAT.

NIX, INC.

Super Nikko-Rack


Assembly Manual

Notation	Article
Type1	R25, N25, SR25
Type2	T25


Read this manual carefully before assembly.

List of parts All photos represent Type1. (The parts of Type 2 are different in shapes and specifications.)

- ①-A Guide rail unit A...1 unit
- ①-B Guide rail unit B...1 unit

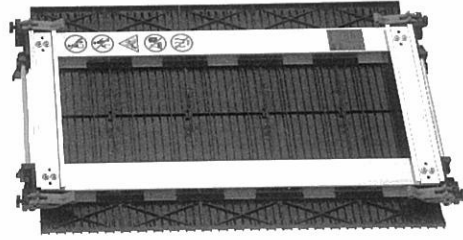


- ② Base.....2 pcs

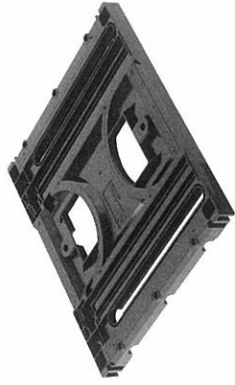

*For Type 1, the two bases (top and bottom plates) are identical.
*For Type 2, the top plate is differently shaped from the bottom plate. Take care not to confuse them.

Composition of parts

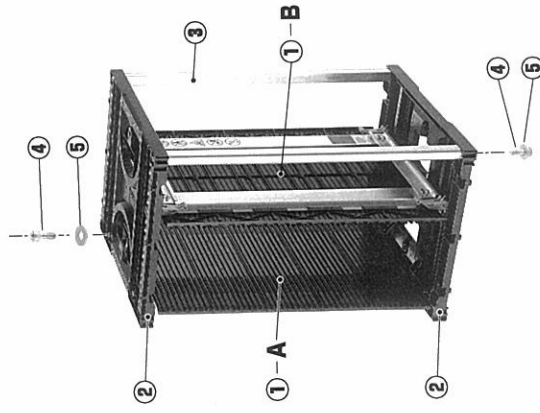

*Note that, for Type 2, both Unit A and Unit B have vertical orientation.

- ③ Guide channel U.....2 pcs
(4 pcs for Type 2)




- ④ Hexagon socket head cap screw M6×16.....8 pcs
(12 pcs for Type 2)



- ⑤ Flat washer...8pcs
(12 pcs for Type 2)



- ⑥ Spacer.....2 pcs
(designed specifically for Type 2)



Operating precautions


1. Do not use this product as a stool to stand or sit on. Any such practice might damage the product, resulting in injury.
2. Do not throw this products or apply a strong impact to it. This might result in deformation or damage.
3. Do not under any circumstances use detergent, screw lock, grease, or other organic solvent. This might result in deformation or damage.
4. Do not expose this product to direct sunlight or ultraviolet radiation. Any such practice may result in deformation or damage.
5. Before moving this product, be sure to check that the lever is locked. The moving parts may move when you least expect it, resulting perhaps in getting your finger or other part of your body caught.
6. Do not put this product into a hot drying furnace. Any such practice might result in deformation or damage.
7. When reassembling or otherwise handling this product, be careful about the sharp tips of the parts. They may result in injury.

For questions about this product, please contact : ☎ +81-45-221-1350

Assembly procedure *Assemble the parts in numerical order : ① to ④.

1 Installing guide channel U.


Fix guide channel U on the base (bottom plate) with hexagon socket head cap screws (at two locations).

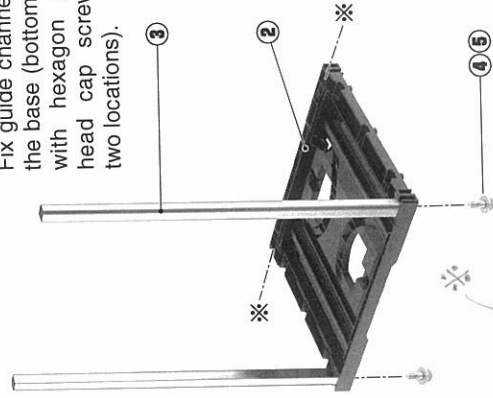


- For Type 2 (with four guide channel U's), install them at the locations marked * as well.

2 Installing guide rail unit A

Fix guide rail unit A on the base (bottom plate) with hexagon socket head cap screws (at two locations).

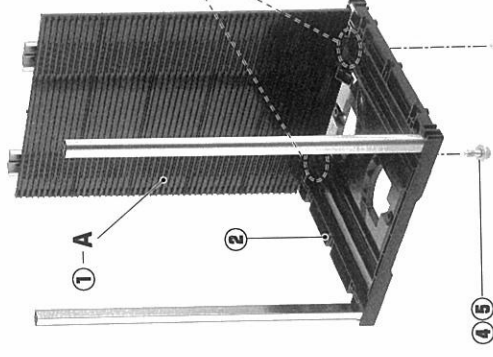


For Type 2, before installing guide rail unit A, attach the spacer (a part designed specifically for Type 2) to the base (at two locations).

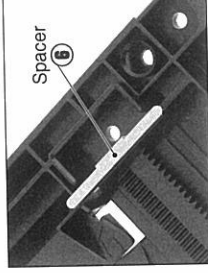

4 Installing the base (top plate)


- ④-1

Install the base (top plate). In that stage, do not fix it with hexagon socket head cap screws.

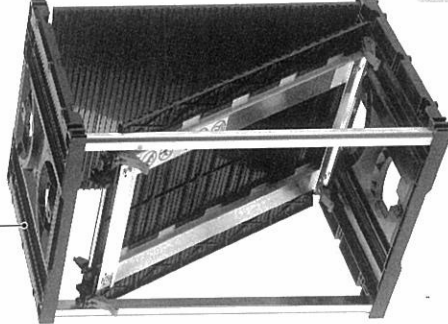


- ④-2

Then hold the part of the base (top plate) closest to you with your left hand, while press the top of guide rail unit B towards Unit A with your right hand until it clicks (see the bottom portion of the photo).

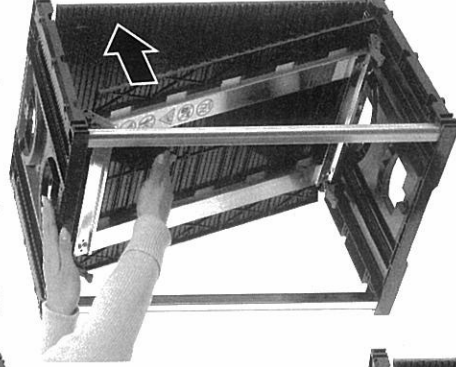


- ④-3

Press the floating base (top plate) from above, thus making it so that the pin of Unit B becomes visible.



- ④-4

Slide guide rail unit B towards you, then fix the base (top plate) with hexagon socket head cap screws (four locations).

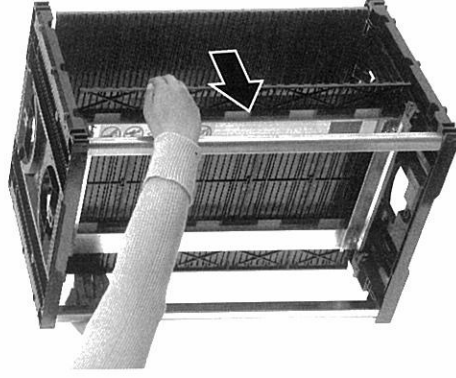

Assembly complete

Screw fastener, hexagon wrench (5 mm between planes); fastening torque range, 2.45 to 2.94 (N·m)

http://www.nix.co.jp/english

Japan

220-6108, Yokohama-shi,

Nishi-ku,

Minato Mirai,

2-3-3,

8F, Queens Tower B,

NIX, INC.

This product is compliant with the RoHS Directive

本製品はRoHS指令対応品です。